












BS503P




IR CAMERA 420TVL

BS 503P

-  **1/3" SONY interlire CCD**
-  **420 TVL resolution**
-  **C/CS lens mount**
-  **0,5LUX in mode color,0 LUX in mode N/B or IR**
-  **PAL/NTSC Signal mode**
-  **Auto/Off Gain control function**
-  **DC/Video Auto Iris driver**
-  **On /Off Back light Control System**
-  **Color (day) to B/W (night) Auto switch (Optionnel)**
-  **Antivandal Shell**
-  **Infrared sensorable function**

Description :	
Image device:	1/3" SONY interlire CCD
Signal system	PAL/NTSC
Number of pixels:	PAL712 (H) X 582 (V)
Scanning System:	PAL625LinesW, 50 Field/sec
Sync System :	Inter line Synchronisation
Horizontal Resolution :	420 TVL
Lens	4mm.8mm
Leds	42 leds IR
S /N Radio :	More Than 52dB
Min.illumination	0,5LUX in mode color,0 LUX in mode N/B or IR
Distance(meter)	25-30m
View angle	45°
IR LED	14 unit 850nm
Average life	20000hrs,warranty life:6000hrs
Water resistance	IP65
Video output	1Vp-p 75Ω
Operation Temperature:	-10°C~+50°C
Supplied power	DC12V ±5% 750 mA

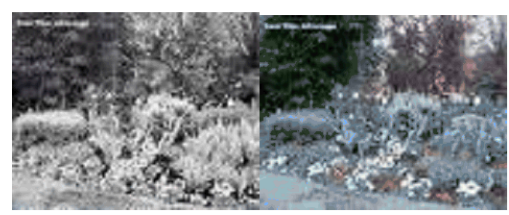

with IR without IR